NOT A DESIGN - NOT FOR CONSTRUCTION - NOT A PERMIT TO LOAD

SCAFFOLD BRIDGING PLATFORM

Design submission pack | Rear alley between two dwellings, Christchurch, Dorset BH23 | BNS-SC-001 Rev P01 | 11 October 2026

A 14.00 m bridging scaffold carrying a working platform between two dwellings being re-roofed

NOT A DESIGN - NOT FOR CONSTRUCTION - NOT A PERMIT TO LOAD

WHY THIS IS A BESPOKE DESIGN

A platform that bridges the gap between two separate structures is outside every TG20:21 and TG30:24 compliance sheet. There is no standard configuration to reference, so it has to be designed, and the design has to be checked by someone other than the designer. That is the whole reason this pack exists in its present form: it is the submission, not the approval.

- Tube and fitting to TG20:21 for the standards, ledgers, transoms and boards.
- The bridging span, the tie arrangement, the loading bay deck and the wind case are BESPOKE - outside the standard parts of TG20:21.
- Design and independent check to BS 5975-1:2024. The design is owned by the designer, the check by a different competent person.
- Nothing is erected, and nothing is loaded, until a permit to load is issued by the Temporary Works Coordinator.
- Falls under CDM 2015: this is a temporary works item on the register with a named TWC.

THE CRITICAL PATH - BEFORE ANY TUBE MOVES

TIES: written consent from the adjoining owner. The scaffold is 17x short on self-weight against wind, so the ties are structural, not restraint. No consent, no concept - and a rethink before erection, not on the morning.

MEASURE the clear width wall face to wall face. Everything in this pack is set from an assumed 1.50 m. If it is not 1.50 m, the bay spacing and the platform change.

MEASURE the eaves height, and the soffit and gutter projection, once the strip starts.

CONFIRM the ground under the legs, and the services in the alley.

CONFIRM whether anything is netted or sheeted. It decides the wind case.

One rafter measured after the strip settles the roof pitch.

THE FIVE NUMBERS THAT DECIDE THIS JOB

14.00 m run	11 frames, 22 standards at 1.40 m centres
5.75 m deck	3 lifts at 2.00 m, 1.35 m platform
17x wind	270 kNm overturning vs 16 kNm self-weight - ties mandatory
30 ties	3.0 kN each, 50% of assumed capacity
20 t kentledge	the alternative, shown only to prove it is not practicable

PACK CONTENTS

Sheet	Title and what it is
SC-00	
SC-01	
SC-02	Setting-out plan, 1:50 - plan of the alley showing frames, bays, ties, loading bay, access and the pedestrian route
SC-03	
SC-04	Section A-A through the gap, 1:30, plus details - what actually fits between the two walls and why the deck sits below the soffit
SC-05	
SC-06	Load demand and calculation summary
SC-07	
SC-08	Method statement
SC-09	
	Erection briefing - one page for the crew

WHAT THIS PACK IS NOT

x It is not a design. No member size here is signed off, and the beam is explicitly a CANDIDATE pending the designer's own check.

x It is not a permit to load, and it cannot be turned into one.

x It is not a TG20:21 compliance sheet, and no number in it may be presented as one.

x It is not a survey. Every value marked SURVEY or ASSUMED in SC-04 must be replaced by a real one before the designer commits.

Prepared by Banksy (agent) for D Hopwood

For check by a competent temporary works designer, who owns the design and the independent check under BS 5975-1:2024.

Status DESIGN SUBMISSION FOR CHECK AND APPROVAL BY A COMPETENT TEMPORARY WORKS DESIGNER

Rev P01 | 11 October 2026 | BNS-SC-001 | print A3 at 100 per cent, do not scale

SCAFFOLD BRIDGING PLATFORM **Rev P01**


Project	Scaffold bridging between two properties - re-roof
Drawing	SC-00 of 10
Reference	BNS-SC-001
Date	11 October 2026
Drawn	Banksy (agent) for D Hopwood

NOT FOR CONSTRUCTION - NOT A DESIGN - NOT A PERMIT TO LOAD

NOT A DESIGN - NOT FOR CONSTRUCTION - NOT A PERMIT TO LOAD

SETTING-OUT PLAN

Scale 1:50 at A3 | run 14.00 m | platform 1.35 m | 11 frames at 1.40 m centres

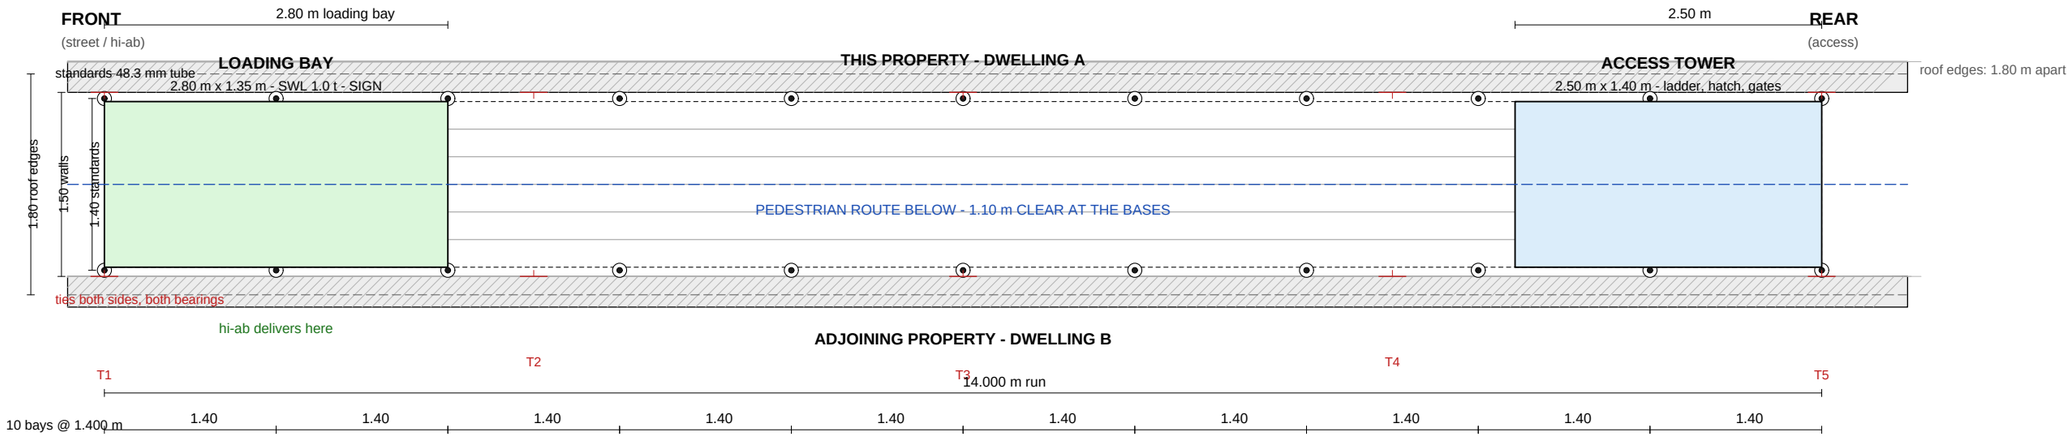

SCOPE OF THIS SHEET

Setting out for a designed scaffold bridging the gap between two properties, tube and fitting to TG20:21 for the standard parts.

The BRIDGE ITSELF IS OUTSIDE EVERY TG20 COMPLIANCE SHEET and is a bespoke design: the bridging beams, the toe of the standards, the tie scheme and the stability case all require a competent temporary works designer's design and an independent check to BS 5975-1:2024.

Nothing is erected or loaded until a permit to load is issued.

WIND - THE GOVERNING CASE

Design wind force over the 14 m x 6 m face: 90 kN netted, 73 kN open.
Overturning 270 kNm against 16 kNm of self-weight: TIES ARE STRUCTURAL.
30 ties, 3.0 kN each. A tie takes compression as well as tension.

TO BE RESOLVED BEFORE ERECTION

Clear width wall to wall - MEASURE. Adopted 1.50 m.
Eaves soffit projection and its level - MEASURE. Adopted 0.15 m projection, deck set 0.25 m below the soffit.
Ground and sub-base under the legs plate or trial.
Drain and gully positions (photographs show gratings).
Overhead cabling in the alley.
Delivered pack weight - adopted 1.0 t, goes on the sign.

SCALE BAR - metres (1:50)

0 — 6 m

SETTING-OUT PLAN

Rev P01


Project	Scaffold bridging between two properties - re-roof
Drawing	1 of 3
Reference	BNS-SC-001
Date	11 October 2026
Drawn	Banksy (agent) for D Hopwood

NOT FOR CONSTRUCTION - NOT A DESIGN - NOT A PERMIT TO LOAD

NOT A DESIGN - NOT FOR CONSTRUCTION - NOT A PERMIT TO LOAD

LONGITUDINAL ELEVATION

Scale 1:50 at A3 | looking at dwelling A | 3 lifts of 2.00 m | deck at 5.75 m

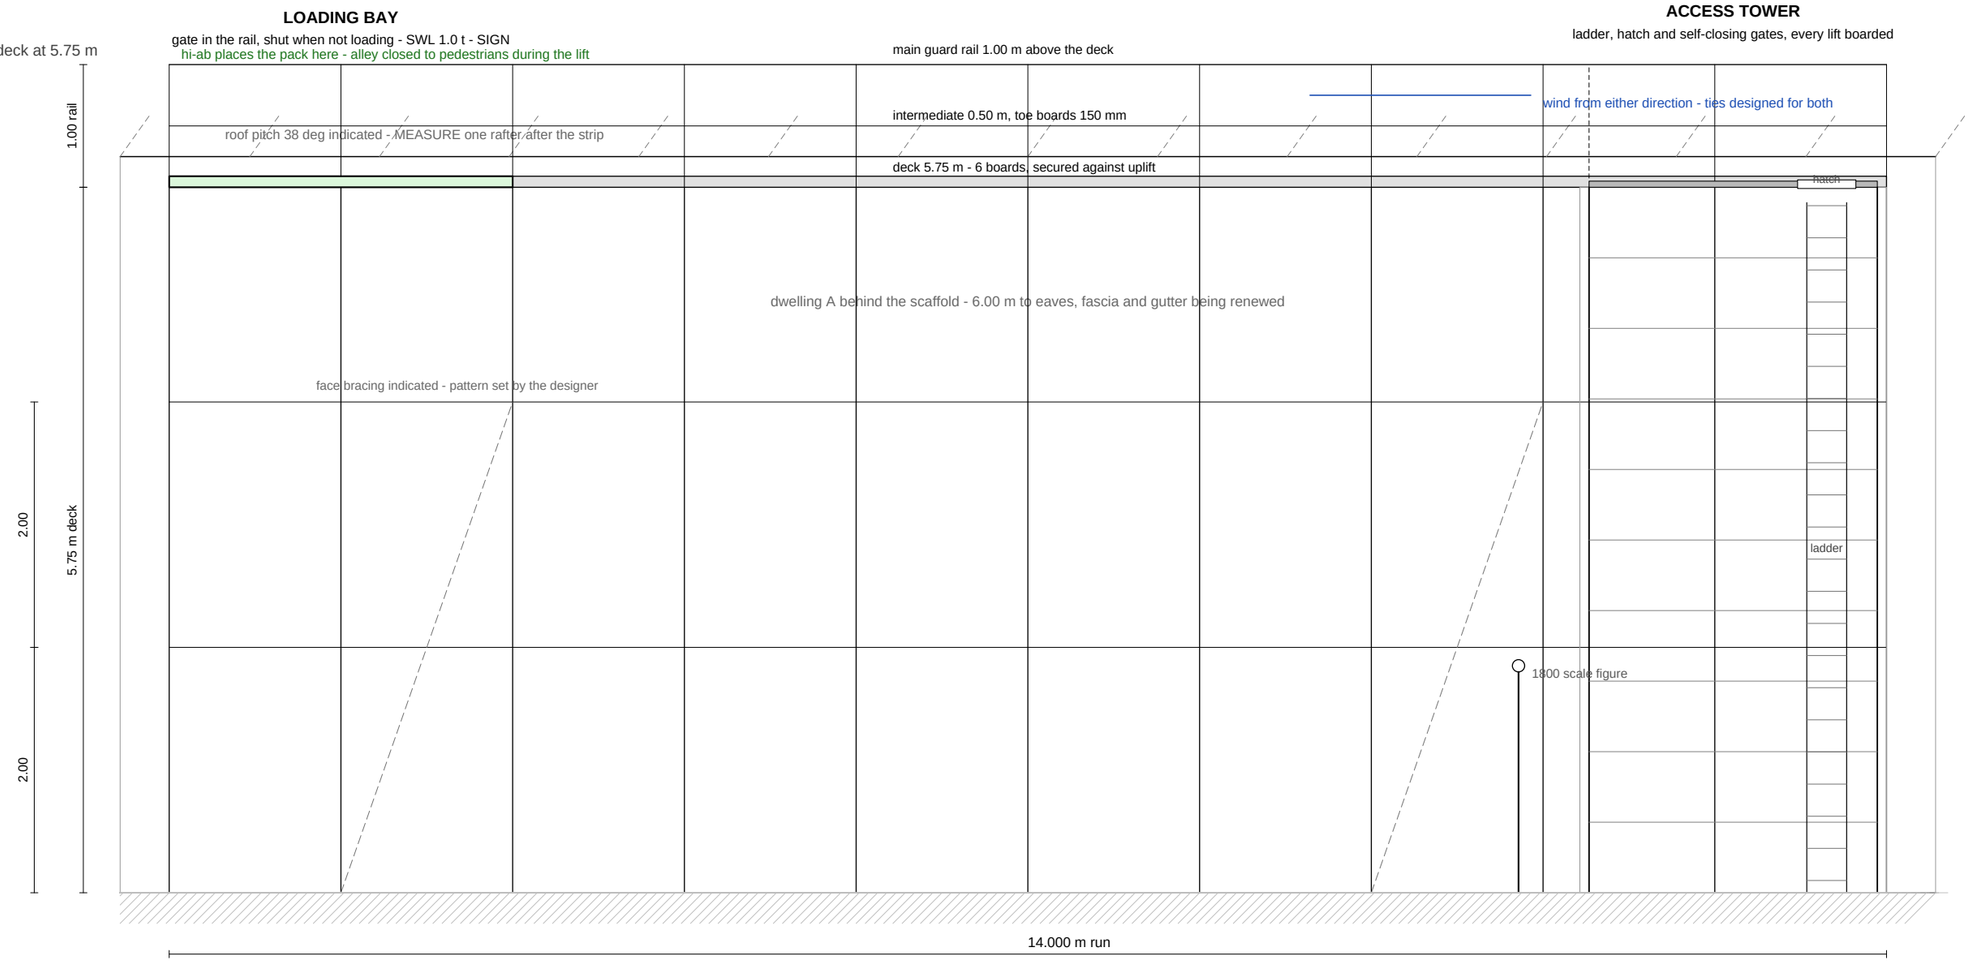

EDGE PROTECTION - BOTH ENDS

Guard rails: main at 1.00 m and intermediate at 0.50 m above the deck,
with 150 mm toe boards, to every edge INCLUDING BOTH ENDS of the run.
Brick guards or debris netting to the platform edges. Deck boarded full width with
no gap between the outer board and either wall face.
Boards secured against uplift (design uplift 12.7 kN over the deck).

WIND RULES

Erection and dismantling boards and sheets: stop at 20 mph (9 m/s) sustained.
Working on the platform: stop at 30 mph (13 m/s) sustained, or sooner when
handling materials on the deck.
Netting or sheeting is NOT part of this design. Fitting it re-opens the wind
case and the design must be re-run BEFORE it goes on.
Anemometer on site, forecast monitored by a named person each day.

ERECTION SEQUENCE (full method in the RA/MS)

1. Set out from the REAR. Base plates on 300 x 600 spreaders laid along the run.
2. Both rows built together, lift by lift. Ties are placed as each lift is reached -
   no lift is boarded until it is tied.
3. Deck, toe boards, both rails, brick guards, then the loading bay gate.
4. Dismantle in reverse. The alley is closed for any lift that moves boards.
5. Inspection before first use, then in accordance with the statutory regime.

THE ONE THING ON THIS DRAWING THAT MATTERS

The overturning moment from wind is 270 kNm. Self-weight gives 16 kNm.
The scaffold cannot stand up on its own: 30 ties at 3.0 kN each are
STRUCTURAL, and most of them go into the adjoining property.
Written consent for the ties and the access is required BEFORE erection.

SCALE BAR - metres (1:50)

0 — 6 m

LONGITUDINAL ELEVATION

Rev P01


Project	Scaffold bridging between two properties - re-roof
Drawing	2 of 3
Reference	BNS-SC-001
Date	11 October 2026
Drawn	Banksy (agent) for D Hopwood

NOT FOR CONSTRUCTION - NOT A DESIGN - NOT A PERMIT TO LOAD

NOT A DESIGN - NOT FOR CONSTRUCTION - NOT A PERMIT TO LOAD

SECTION A-A THROUGH THE GAP

Scale 1:30 at A3 | 1.50 m wall to wall, ~~1.80 m roof edge to roof edge~~ | ~~deck~~ 5.75 m

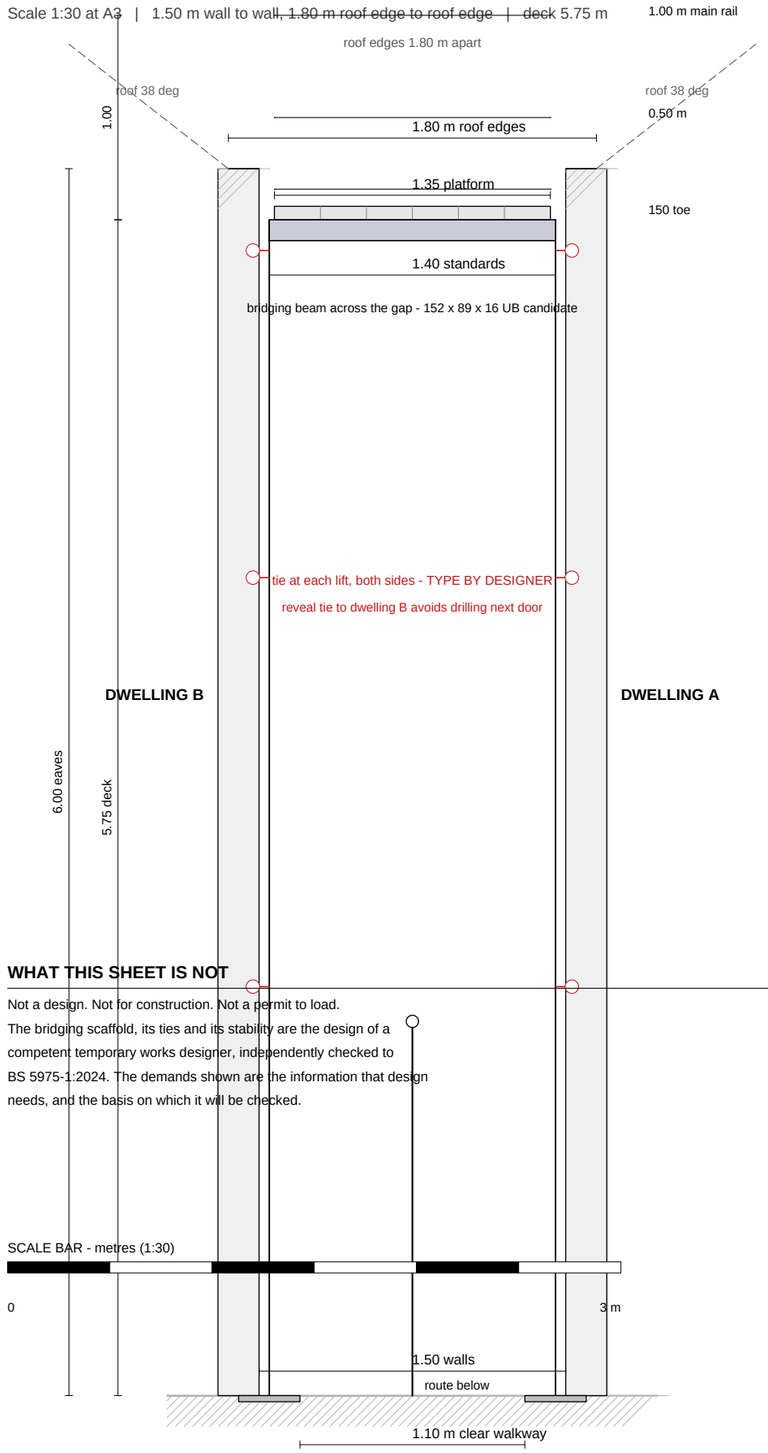

CLASHES RESOLVED ON THIS SHEET

1. THE DECK IS SET BELOW THE EAVES SOFFIT. The gutter and soffit project into the gap; a deck at eaves level fouls them. Clear width between overhangs is about 1.20 m against a 1.35 m platform. Deck level adopted 5.75 m (0.25 m below the soffit).
2. THE 1.80 m GIVEN IS ROOF EDGE TO ROOF EDGE. The wall faces are closer. The standards are set from the WALL dimension, adopted 1.50 m. Measure the walls, not the roof edges.
3. TIES ARE STRUCTURAL. Wind overturning is 270 kNm against 16 kNm of self-weight. Kentledge would need about 20 t. Written consent for ties into the adjoining property is required BEFORE erection, and a Party Wall notice if the ties or access touch it.

WHAT THIS SHEET IS NOT

Not a design. Not for construction. Not a permit to load.
The bridging scaffold, its ties and its stability are the design of a competent temporary works designer, independently checked to BS 5975-1:2024. The demands shown are the information that design needs, and the basis on which it will be checked.

DETAILS TO BE PRODUCED BY THE DESIGNER

Tie type, fixing and test frequency (TG4). Reveal ties preferred to the adjoining property: no drilling, nothing to make good.
Beam seating and coupler arrangement at the standards.
Base plate and spreader arrangement over the drainage runs.
Loading bay deck and the gate in the guard rail.
Roof edge protection set to the ROOF SURFACE once the pitch is measured, with protection carried up the rake.

SECTION A-A AND NOTES

Rev P01

Project	Scaffold bridging between two properties - re-roof
Drawing	3 of 3
Reference	BNS-SC-001
Date	11 October 2026
Drawn	Banksy (agent) for D Hopwood

NOT FOR CONSTRUCTION - NOT A DESIGN - NOT A PERMIT TO LOAD

NOT A DESIGN - NOT FOR CONSTRUCTION - NOT A PERMIT TO LOAD

DESIGN BRIEF - TEMPORARY WORKS

For the competent temporary works designer. Design and independent check to BS 5975-1:2024.

1 THE COMMISSION

Design, detail and specify a bridging scaffold that carries a working platform between two dwellings over a shared pedestrian alley, for use by roofers replacing the roof covering on both properties. Provide the design, the calculations, the tie schedule, the permit-to-load conditions and the temporary works register entry.

2 THE PROPOSED STRUCTURE

Item	Value as briefed
Run front to back	
Gap between roof edges	
Clear width, wall to wall	1.80 m [GIVEN]
Standard spacing across	
Frames / bays	1 at 1.40 m [DERIVED]
Eaves height	
Deck level	6.00 m [GIVEN]
Lifts	
Platform	3 at 2.00 m
Service class	
Scaffold type	BS EN 12811-1 Class 3 = 2.00 kN/m2 [ASSUMED]
Material grade	
	tube S235, beam S275 [ASSUMED - CONFIRM from certificates]

3 SITE AND CONTEXT

Rear alley between two dwellings, Christchurch, Dorset BH23. Coastal town, two-storey period housing, yellow stock brick.

The alley between the two properties is a shared pedestrian route and is used by the neighbouring property. It is the only way along the rear of both houses.

Access for the scaffold is at the REAR. Deliveries arrive at the FRONT into a loading bay on the scaffold itself, placed by hi-ab over the alley entrance.

Both properties are being re-roofed in the same campaign, and the neighbour is the other property owner - so the tie conversation is one conversation, not two.

Cabling is visible overhead in the alley and gully gratings are visible underfoot.

4 WHAT THE DESIGNER MUST SATISFY THEMSELVES ON

Ground bearing under the legs - trial or plate test. Nothing in this pack relies on ground better than 100 kN/m2, and that is an assumption.

Tie capacity and the tie substrate in BOTH buildings, to TG4. Reveal or box ties into the window reveals are preferred to drilled anchors in the neighbour's wall.

Whether anything is to be netted or sheeted. Netting raises the design wind force from 73 kN to 90 kN and every number changes.

Overhead services and the hi-ab lift path.

The party wall position, and whether notice under the Party Wall etc. Act 1996 is needed.

5 SITE INPUTS AND THEIR STATUS - REPLACE EVERY ONE

Input	Value used	What is needed
Clear width wall face to wall face	~1.50 m [ASSUMED]	
Eaves height above the alley		
Scaffold type	6.00 m [GIVEN]	to roof edge, which is wider than the walls
Ground / sub-base under the legs		
Netted, sheeted or open	concrete/asphalt, unknown sub-base	TG20:21 is the framework; the bridge itself is a bespoke design
Roof pitch		
Duration	38 degrees estimated from photographs	DECIDES the wind case. See section 5
Party wall / neighbour consent		
Overhead services in the alley	Dal to arrange	Runs the inspection regime and coprob
Buried services / drains		
Delivered pack weight	gully gratings visible in photographs	SURVEY before erecting, and again before the hi-ab lifts.
	1.0 t [ASSUMED]	SURVEY - legs and hi-ab outriggers must not bridge or crush them.
		CONFIRM - this figure is designed for and goes on the sign.

6 THE DESIGN CASES TO BE COVERED

Wind from either direction, tied, with the platform planked - the governing case.

Wind with netting, shown for the record: it makes the ties do more, and it is why netting is excluded from this design.

Working wind plus the notional horizontal load, so the job can be worked in a breeze.

Board uplift with the deck planked - a planked deck is a lifting surface.

The loading bay: 12.3 kN placed over a 1.20 m2 footprint, which is a LOCAL member check because it cannot be spread to Class 3 within the bay.

Accidental and impact: a hi-ab load placed, not swung; nothing is designed for crane impact.

Erection and dismantling stages, which are usually worse than the completed condition: a partially tied scaffold at 6 m has nothing to resist wind.

Protection of the pedestrian route below, and falling-object protection.

7 WHAT WE NEED BACK FROM THE DESIGNER

Calculations, with the check category stated and the checker named.

The final member schedules and the tie schedule, with positions and capacities.

The loading-bay deck design, the SWL, and the exact figure for the sign.

Permit-to-load conditions, including the wind stop rules and the inspection regime.

A statement of the assumptions they relied on, so the site knows what must hold true.

8 DESIGN CHECK CATEGORY

This is the Temporary Works Coordinator's selection, not ours, and it must be made on the register before the design is issued. Our recommendation, offered as a starting position only: a bespoke bridging structure carrying people over a live pedestrian route, with no published guidance behind it and loads that are not the usual case, points at the top end of the scale - a check by a competent person from a DIFFERENT organisation to the designer. If a lower category is chosen, the reason should be written down.

DESIGN BRIEF - TEMPORARY WORKS **Rev P01**

Project	Scaffold bridging between two properties - re-roof
Drawing	SC-04 of 10
Reference	BNS-SC-001
Date	11 October 2026
Drawn	Banksy (agent) for D Hopwood

NOT FOR CONSTRUCTION - NOT A DESIGN - NOT A PERMIT TO LOAD

NOT A DESIGN - NOT FOR CONSTRUCTION - NOT A PERMIT TO LOAD

LOAD DEMAND AND CALCULATION SUMMARY

Indicative demands for the designer to design against and check. Every value says where it came from.

GEOMETRY, LOAD AND MEMBER CHECKS

Check	Result and where it comes from
Platform	
Gap	
Frames / legs	1.80 m roof edge to roof edge; 1.50 m wall to wall <- standards set from the WALL dimension, not the roof edge
Dead load	
Live load	22.6 kN <- boards + tube + beams
Design load (ULS)	
Leg load	87.2 kN <- 1.35 G + 1.5 Q
Leg capacity	
Leg utilisation	N_b,Rd = 40.5 kN (chi = 0.34, curve c) <- BS EN 1993-1-1 buckling, Le = lift height
Bridging beam, bending	
Bridging beam, shear	M_Ed = 0.60 kNm vs M_c,Rd = 38.69 kNm = 2% <- 152 x 89 x 16 UB, S275
Beam deflection	
Board span	0.0 mm vs limit 7.0 mm (span/200) <- 1.40 m span is not the driver
Base bearing	
Walkway under the deck	22.0 kN/m2 on 300 x 600 mm, laid along the run <- allowable assumed 100 kN/m2
Wind, open frame	
Wind, netted	73.3 kN <- qp = 0.671 kN/m2, cp,net = 1.3
Wind moment	
Tie demand	270.5 kNm vs 15.8 kNm from self-weight <- 17.1x short - TIES ARE MANDATORY
Kentledge alternative	
Board uplift	19.7 t total, 2.0 t per bay <- shown only to demonstrate it is not practicable
Lifts	
Roof works	3 lifts at 2.00 m to a 6.00 m platform <- tube and fitting to TG20:21
Materials on the deck	
Hoist	none stored beyond the loading bay allowance <- Class 3 working platform, not a store none assumed <- a hoist is a design, not a bolt-on

LOADING BAY AT THE FRONT

! SWL sign on the scaffold at the bay, giving the figure it is designed for.

! Self-closing gate in the guard rail at the bay, shut whenever a lift is not happening.

! A hi-ab load is PLACED, never swung against the scaffold and never rested on a guard rail. The scaffold is not designed for impact from a crane load.

! Nobody under the load, and the alley closed to pedestrians for the duration of a lift - the loading bay sits directly above the alley entrance.

! Banksman, and the hi-ab standing area checked for drains, services and overhead cables before the first lift.

! The bay is a LANDING POINT. No storage beyond the delivered pack, and no barrowing a tonne down a 1.35 m deck - material goes onto the roof, not along the platform.

WHAT THIS ADDS UP TO

* The legs, ledgers, boards and the 1.40 m bridging span are all comfortable. None of them is the design driver.
* WIND IS THE DESIGN CASE. Even unnetted the overturning moment is 14x what self-weight can resist, and netting takes it to 17x. A 1.40 m wide base at 6.00 m has almost nothing to push back with.
* Therefore TIES TO BOTH BUILDINGS ARE STRUCTURAL, NOT OPTIONAL. A tie must take compression as well as tension, because wind acts from either direction.
* If ties into the neighbouring property cannot be agreed, this concept does not stand up. Kentledge would need about 20 t (2.0 t per bay) on a 1.40 m base - not practicable, and it would load the very deck people are working on. The rethink happens BEFORE erection, not on the day.
* Boards must be secured against uplift. A planked deck is a lifting surface.
* The loading bay's global structure is comfortable; what needs care is the bay deck itself and the method of placing the load over a live pedestrian route.

THE WIND CASE, STEP BY STEP

Step	Value
Basic wind velocity vb,0 (assumed, coastal Dorset)	
Exposure factor Cef (assumed, ~6 m, town, near coast)	
Peak velocity pressure qp = 0.613 x Cef x vb,0^2	1.90
Face area of the scaffold (14.00 m x 6.00 m)	
Net pressure coefficient, open frame	84.0 m2
Net pressure coefficient, with debris netting	
Wind force, open frame	1.6
Wind force, netted - DESIGN CASE	
Force per metre of run, netted	90.2 kN
Overturning moment about the base	
Moment self-weight can resist	270.5 kNm
Shortfall - why ties are mandatory	
Tie demand, over 5 columns x 3 levels x 2 faces	17.1x
Assumed working capacity of a proprietary tie (TG4)	
Tie utilisation	6.0 kN
Kentledge that would be needed instead	
Board uplift over the deck	19.7 t (2.0 t per bay) 12.7 kN (2.11 kN per board)

READ THIS BEFORE QUOTING ANY NUMBER FROM THIS SHEET

x The wind velocity, the exposure factor, the pressure coefficients, the ground allowable, the tube grade, the tie capacity, the service class and the board span limit are all ASSUMED. The designer replaces them, and the answer may move.

x The leg, the ledgers and the bridging beam are nowhere near their limits, so the assumptions behind them are not sensitive. The WIND case is sensitive, and that is where the check belongs.

x Nothing stored on the deck beyond the loading bay allowance. A Class 3 platform with materials stacked on it is a different structure with a different number.

LOAD DEMAND AND CALCULATION SUMMARY **Rev P01**

Project	Scaffold bridging between two properties - re-roof
Drawing	SC-05 of 10
Reference	BNS-SC-001
Date	11 October 2026
Drawn	Banksy (agent) for D Hopwood

NOT FOR CONSTRUCTION - NOT A DESIGN - NOT A PERMIT TO LOAD

NOT A DESIGN - NOT FOR CONSTRUCTION - NOT A PERMIT TO LOAD

RISK ASSESSMENT

Assessed against the design as briefed. To be reviewed by the designer, the TWC and the scaffolding contractor.

Assessment of the works as designed. Residual risk is stated assuming every control is in place - these are not optional measures, and the ones marked with an exclamation are hold points.

Ref	Hazard / activity	Who is at risk	Control measures	Residual
R1	Working at height on the bridging deck, 5.75 m up	Crew on and below the deck	Collective protection first: guard rails to every edge including BOTH ends, main rail at 1.00 m and intermediate at 0.50 m, 150 mm toe boards, brick guards or debris netting to the platform edges. Harness only where collective protection cannot be provided, to a designed anchor point. SG4:22 competence. Permit to work for the deck. No lone working.	Medium
R2	Overloading or collapse of the platform	Crew on and below the deck	Loads split, mechanical aids used where they fit. Tube lengths controlled on the deck. The deck is a working platform, not a store and not a materials route. Team lifting.	Medium
R3	Wind overturning the scaffold - the governing case	Crew on and below the deck	Base bearing is 22.0 kN/m2 on 300 x 600 mm, laid along the run, against an assumed 100 kN/m2 allowable. Confirm the ground before erection. Monitor for settlement, especially after rain, and after any hi-ab delivery nearby.	Medium
R4	Falling objects into the shared alley	Pedestrians, the neighbour, crew below	Site secured, access tower with a gate or short cover, ladder removed or boarded out of hours, scaffold not left as a climbing frame. Signage with the site contact. Inspect and record weekly and after severe weather.	Low
R5	The pedestrian route runs directly under the works	Pedestrians, the neighbour, crew below	Boards cleared of ice and standing water. Inspection regime: before first use, every 7 days, and after any event likely to affect stability. Wind stop rules enforced. Anemometer on site with a named person checking the forecast daily.	Medium
R6	hi-ab delivery placing a load above the pedestrian route	Public, crew	enforced (SC-07). Netting or sheeting is outside this design and must not be added. Any disturbed tie stops the job until it is reinstated and signed.	Low
R7			alternative route agreed with the neighbour in advance.	
R8	Buried services and drains under the legs and outriggers	Crew, public	scaffold, outriggers on spreaders clear of drains, overhead cables checked, lift kit inspected.	Medium
R9	Damage to the neighbouring property, and the party wall	Crew, public	Survey and identify before erection - cabling is visible overhead. Isolate or protect as required. Exclusion zone while working near them. Re-check before every hi-ab lift. Goal posts or height markers if the hi-ab needs them.	Medium
R10	Interface with the roof stripping and covering on both properties	Roofers, crew	and the brickwork before and after. Any fixings into their property made good.	Medium
R11	Erection and dismantling - the highest-risk phase		One sequence, agreed between the roofing crew and the scaffold crew. Deck set below the soffit so the eaves can be worked. Roof-edge protection set relative to the ROOF SURFACE and carried up the rake, not set off the deck. No sheeting. Materials	Medium
R12	Manual handling of tube and boards on a 1.35 m deck		Competent crew. SG4:22. collective protection advanced ahead of the operative. Ties installed as the lifts go up - a partially tied scaffold at 6 m has nothing to resist wind. No personnel below during a strike. Strict sequence (SC-07). Tool-box talk before	Medium
R13	Unauthorised access, including by children	Crew, public	Site secured, access tower with a gate or short cover, ladder removed or boarded out of hours, scaffold not left as a climbing frame. Signage with the site contact. Inspect and record weekly and after severe weather.	Low
R14	Weather - rain, ice and wind on the deck	Public, children	Boards cleared of ice and standing water. Inspection regime: before first use, every 7 days, and after any event likely to affect stability. Wind stop rules enforced. Anemometer on site with a named person checking the forecast daily.	Medium
R15		Crew		Low

HOLD POINTS - WORK STOPS UNTIL THESE ARE CLEARED

! No erection until written consent for the ties and the access is in hand, and the designer's design has been checked and issued.

! No load on the deck until a permit to load is issued by the Temporary Works Coordinator.

! No netting or sheeting is ever added without the wind case being re-run by the designer. It takes the design force from 73 kN to 90 kN.

! No hi-ab lift over the alley until the route is closed and swept and a banksman is in position.

RISK ASSESSMENT **Rev P01**

Project	Scaffold bridging between two properties - re-roof
Drawing	SC-06 of 10
Reference	BNS-SC-001
Date	11 October 2026
Drawn	Banksy (agent) for D Hopwood

NOT FOR CONSTRUCTION - NOT A DESIGN - NOT A PERMIT TO LOAD

NOT A DESIGN - NOT FOR CONSTRUCTION - NOT A PERMIT TO LOAD

METHOD STATEMENT

Build, use and strike sequence. The order matters - every step has a reason.

Read with SC-06 (risk assessment) and SC-09 (erection briefing). Steps 3, 6, 7 and 18 are the ones that go wrong on a bridging scaffold.

1. **Survey and measure**
   Clear width wall face to wall face, eaves height, soffit and gutter projection, ground, services overhead and below, party wall position. Everything in SC-04 marked SURVEY must be closed out. Take photographs.
2. **Confirm the design**
   Designer's design received, checked, and the check category recorded. Temporary works register entry made. Permit-to-load conditions understood by the crew.
3. **Agree the neighbour**
   Written consent for ties and access. Party Wall notice as applicable. Condition survey with photographs. Agree the alley closure protocol and an alternative route.
4. **Set out**
   Set out the 11 frames at 1.40 m centres from one datum. The standards go 1.40 m apart across the alley (0.05 m clearance from each wall face) - set out from the WALLS, never from the roof edges. Mark every position.
5. **Prepare the ground**
   Clear the base line. Sole pads 300 x 600 mm, laid along the run under every standard - the pads keep 1.10 m of walkway clear between the rows. Protect and bridge gullies.
6. **Erect the first lift**
   Base plates, standards, ledgers at 2.00 m, transoms at each frame. Keep the alley route open as long as possible; work in short sections.
7. **Tie as you go**
   Ties at 5 columns x 3 levels x both faces = 30 ties. Ties go in with the lifts, not at the end. A partially tied scaffold at 6 m is the danger case.
8. **Second and third lifts**
   Ledgers at 4.00 m and 6.00 m, transoms to match, bracing as designed. Standards run to 6.90 m to take the guard rails.
9. **Bridging beams**
   Place the 11 bridging beams at 5.60 m across the alley at each frame, onto the transoms, and secure them against movement.
10. **Board the deck**
    Deck at 5.75 m, 1.35 m wide, 6 boards, fully boarded between the standards with no gap at either wall. Secure every board against uplift.
11. **Guard rails and toe boards**
    Main rail 1.00 m, intermediate 0.50 m, toe boards 150 mm, to ALL FOUR edges because both ends of the run are open edges. Brick guards or debris netting to the platform edges.
12. **Loading bay**
    Front 2.80 m of the deck is the loading bay. Bay deck built to the designer's detail - ply and close-centred bearers, because the pack cannot be spread to Class 3 pressure within the bay. Self-closing gate in the front guard rail. SWL sign: 1.0 t placed, 12.3 kN design.
13. **Access tower**
    Rear of the run, clear of the pedestrian route. Gate or short cover. Ladder secured, and removed or boarded out of hours.
14. **Inspect and hand over**
    Inspection by a competent person before first use, recorded. Permit to load issued by the TWC. Signage in place. Register updated.
15. **Roof works**
    Roofers work from the deck. Materials are placed onto the ROOF or landed in the bay - never barrowed along the platform. Roof-edge protection set to the roof surface and carried up the rake.
16. **hi-ab deliveries**
    Alley closed and swept, banksman on each side, load PLACED not swung, nobody under the load, outriggers on spreaders clear of drains. One pack at a time, to the sign.
17. **Routine inspection**
    Before first use, every 7 days, and after any event likely to affect stability - including a storm, a strike by plant, or any disturbed tie. Written record.
18. **Dismantle**
    Reverse the sequence. Ties stay in until the lift below them is stripped. Netted or part-dismantled scaffolds are not left standing overnight. No personnel below the strike. Deck cleared of all material first.

THE THREE THINGS THAT WILL COME UP ON SITE

! The gap is not 1.50 m. If the walls are further apart than assumed, the standards move, the platform gets wider, and the beam span grows. Stop and go back to the designer - do not pack it out with tube.

! The neighbour will not agree the ties. Then this concept stops, and the answer is a MEWP, a temporary roof frame or a different access method - decided before we start, not on the day.

! Someone wants to net it. Netting is not in this design. It raises the wind force, and it cannot go on until the designer has re-run the case.

METHOD STATEMENT **Rev P01**

Project	Scaffold bridging between two properties - re-roof
Drawing	SC-07 of 10
Reference	BNS-SC-001
Date	11 October 2026
Drawn	Banksy (agent) for D Hopwood

NOT FOR CONSTRUCTION - NOT A DESIGN - NOT A PERMIT TO LOAD

NOT A DESIGN - NOT FOR CONSTRUCTION - NOT A PERMIT TO LOAD

MATERIALS TAKE-OFF AND BUDGET

Quantities are derived from the design. Money is an INDICATIVE BAND - replace it with the scaffolder's quotation.

Item	Basis	Low	Mid	High
Erection and dismantling				
Transport				
Ties, reveal or box type, installed	2 loads at GBP 180	1,985		
Bridging beams				
Sole pads	11 no. 152 x 89 x 16 UB, S275, cut and delivered, at GBP 70-110	750	360	2,118
Loading bay deck				
Smalls	Ply and close-centred bearers to the designer's detail	176	990	1,350
Design and independent check				
Out of hours and alley closures	Bespoke design plus a BS 5975-1:2024 check by a different organisation. BY QUOTATION For the hi-ab lifts over the live pedestrian route	150 1,800 300	325 200 2,900 450	330 400 250 4,000 600
		Low	**Mid**	**High**
TOTAL, excluding VAT, for a 6 to 8 week hire period		6,540	9,080	

HOW TO READ THIS

- The QUANTITIES are real: 22 standards, 11 beams, 30 ties, 22 sole pads and 14.00 m of run come straight from the design and cannot be varied without changing the design.
- The MONEY is not a price. GBP 35-55 per metre per lift is the published 2026 UK rule of thumb for an INDEPENDENT TIED scaffold - a straight run against one building. This is neither. A bridged, tied platform in a 1.50 m alley with a live route beneath it carries the bespoke uplift above, and the design and check are real costs.
- Nothing here covers sheeting, netting or a temporary roof, none of which are in this design.
- Hire beyond the included period is usually 3-5 per cent of the erect price per week. If the re-roof runs long, that is where the money goes.

RATES, AND WHERE THEY CAME FROM

Rate	Source
GBP 35-55 per m per lift	
GBP 180 per load	
GBP 3.50 per m2 netting	PUBLISHED, worked example
3-5 per cent per week after the included hire	
Beams, ties, pads, bay deck, smalls	PUBLISHED
Design and independent check	
Out of hours and alley closures	ALLOWANCE - must be replaced by a quotation ALLOWANCE - engineering judgement

WHAT WOULD CHANGE THE PRICE MOST

x No consent for ties. Then the whole scheme changes, and the price with it.

x A netting or sheeting requirement. Extra material, and a different design case.

x Programme. Hire beyond the included period runs weekly, and this is a long, thin job with a lot of standing time.

x Access. If the alley cannot take the tube in a sensible order, labour goes up - the published guides put restricted access at 15-25 per cent on labour alone.

NOT A QUOTATION. NOT A DESIGN. RATES ARE 2026 MARKET INDICATIONS

Replace every line with the scaffolding contractor's own prices before use.

MATERIALS TAKE-OFF AND BUDGET — **Rev P01**

Project	Scaffold bridging between two properties - re-roof
Drawing	SC-08 of 10
Reference	BNS-SC-001
Date	11 October 2026
Drawn	Banksy (agent) for D Hopwood

NOT FOR CONSTRUCTION - NOT A DESIGN - NOT A PERMIT TO LOAD

NOT A DESIGN - NOT FOR CONSTRUCTION - NOT A PERMIT TO LOAD

ERECTION BRIEFING

One page for the crew. If it is not on this sheet, it is in SC-07.

SET OUT FROM THESE NUMBERS, NOT FROM HABIT

14.00 m	run, front to back, along the alley
11 frames	at 1.40 m centres, 22 standards
1.40 m	between the two rows of standards
50 mm	clearance from each wall face - the tube must not touch the brickwork
3 lifts	ledgers at 2.00, 4.00 and 6.00 m, standards to 6.90 m
5.75 m	deck level - BELOW the soffit, so the eaves can be worked
300 x 600 mm	sole pads, LAID ALONG THE RUN to keep the walkway open
1.00 / 0.50 m	guard rails, plus 150 mm toe boards, to ALL FOUR edges

THE FOUR RULES THAT KEEP THIS UP

! TIES GO IN AS YOU GO. 30 of them, 5 columns x 3 levels x both faces. A half-tied scaffold at 6 m has nothing to hold it.

! THE DECK IS NOT A STORE. One pack in the loading bay, nothing else, ever. Class 3 - 2.00 kN/m2.

! SECURE THE BOARDS. The deck wants to lift: 12.7 kN of uplift over it.

! NO NETTING, NO SHEETING. Not ours to add. It changes the wind load and the design must be re-run first.

STOP WORK - NO ARGUMENT

20 mph	sustained wind, erecting or dismantling boards and sheets
30 mph	sustained wind, working on the platform - and sooner when handling material
ANY TIE	disturbed, missing or suspect - down tools and report it
ANY LIFT	over the alley without the route closed, swept and a banksman in position
ANY CHANGE	to the gap, the ground or the netting question - stop and go back to the designer

THE LOADING BAY IS THE SHARP END

* It sits directly above the alley entrance, on a live pedestrian route.
* SWL 1.0 t placed. Design figure 12.3 kN. The sign tells you what it is designed for - do not exceed it.
* The load is PLACED. Never swung against the scaffold, never rested on a guard rail. The scaffold is not designed for crane impact.
* Alley closed and swept first. Banksman on each side. Nobody under the load, ever.
* Gate shut whenever a lift is not happening.

IF IN DOUBT

- This scaffold is a BESPOKE DESIGN, not a TG20 compliance sheet. There is no standard answer to fall back on, so a question on site is a real question.
- Contact the Temporary Works Coordinator, not the designer directly, and not the site manager's opinion. It is on the register and it has an owner.

ERECTION BRIEFING **Rev P01**

Project	Scaffold bridging between two properties - re-roof
Drawing	SC-09 of 10
Reference	BNS-SC-001
Date	11 October 2026
Drawn	Banksy (agent) for D Hopwood

NOT FOR CONSTRUCTION - NOT A DESIGN - NOT A PERMIT TO LOAD